

Outdoor / LED Street light



NBDD-LED-290D



Application: Street




Main Features:


- IP66 protection degree
- Luminous efficacy is more than 110 lm/W
- Modern streamline die-casting aluminum housing
- Adjusted fixing system: top or side mounting
- Tool-free lighting housing separation design.
- Closure screen in flat tempered glass
- Integrated surge protection device

Technical Data:

- Insulation class:I
- Power supply: 120-277V(50/60Hz)
- LED current:350/530/700mA
- Power Factor:>0.95
- Working Ambient: -40°C~+55°C
- Life span: >50,000hrs
- CRI:Ra>70
- CCT:Warm White (3000-3700K)
- Neutral White (3700-5000K) and Cool White (5000-6500K)
- Net Weight (Max:Watt) : 9.5kg

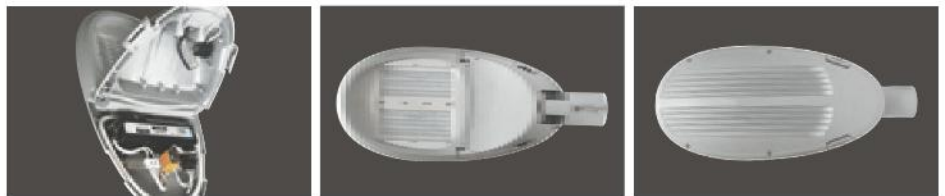

Product Dimensions(mm)

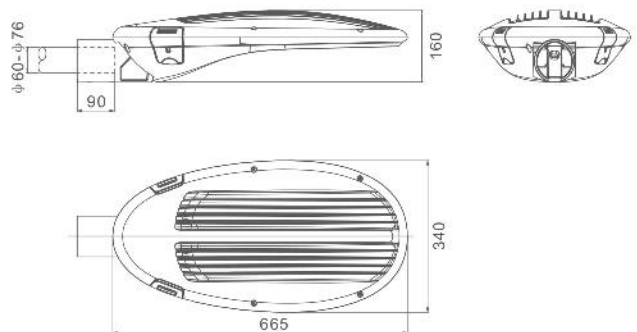

Configuration Data:

Number of LEDs	LED Current	Power Consumpt	Nominal Initial Flux*
72	350mA	80W	8800lm
	530mA	120W	13000lm
	700mA	160W	16800lm

*CCT is Cool White @ 25°C

Polar Diagram

