



# UL LED Panel Light

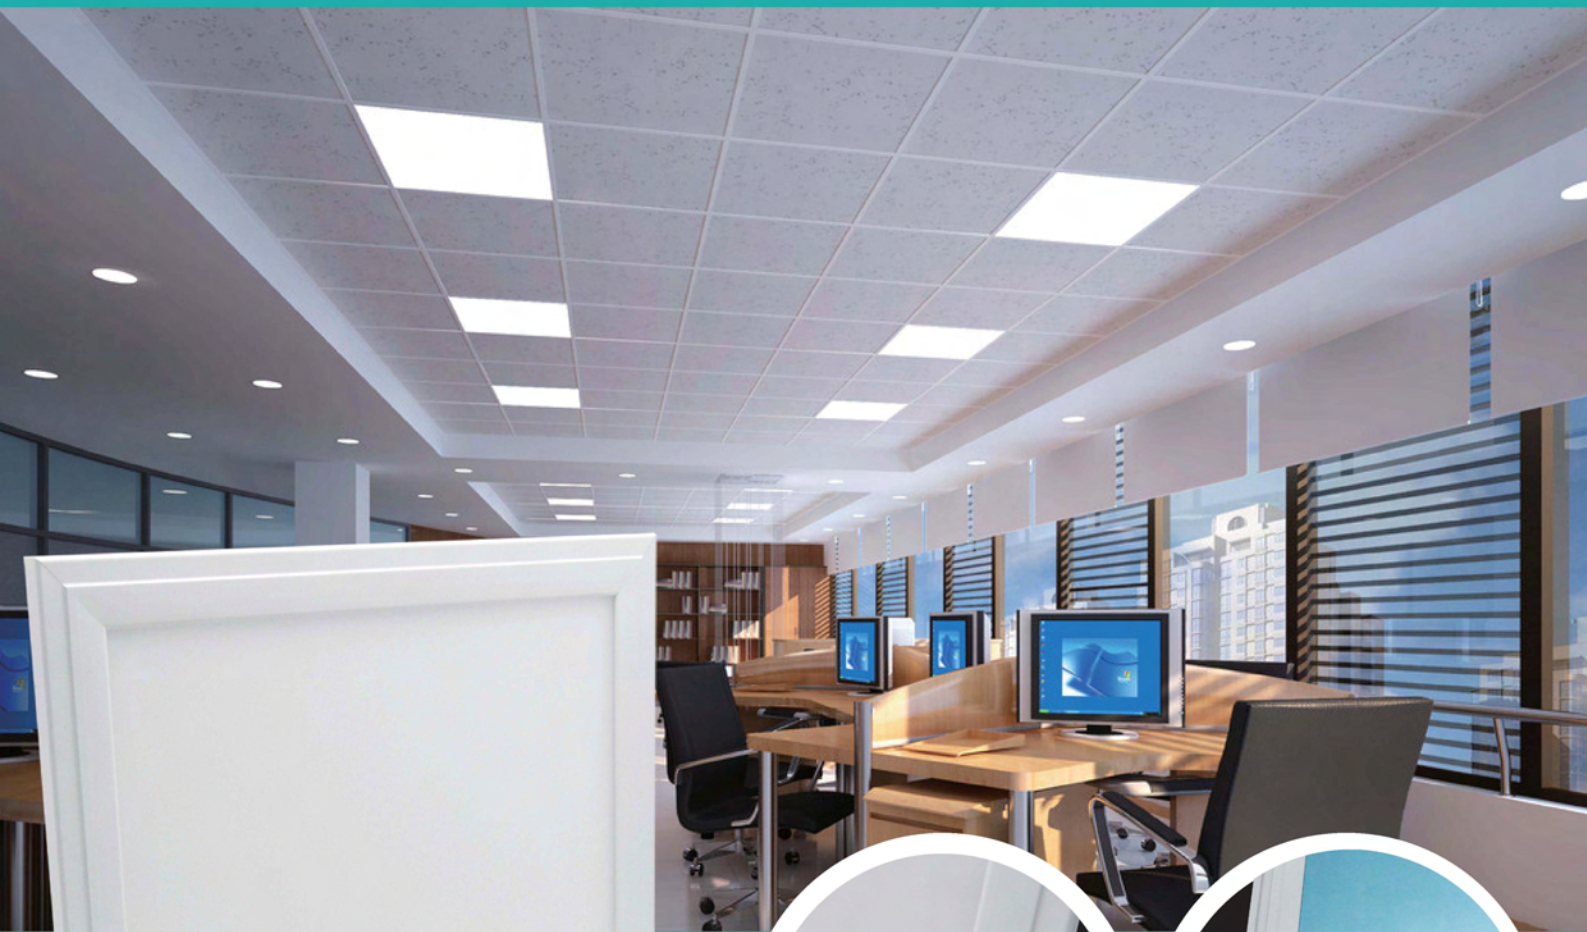


## Features

High brightness SMD LEDs of premium quality; CRI>80.

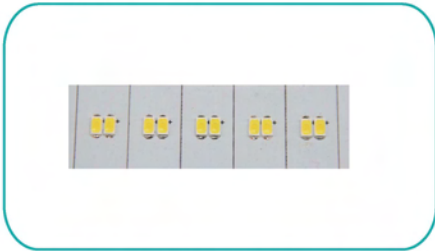


No deformation; No rust; better heat dissipation; more fashionable.

Uniform light by controlling LED BIN very strictly.

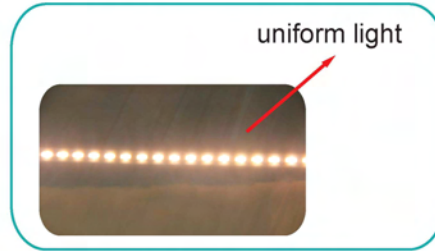


Super quality LED driver to guarantee long lifespan.

Premium PMMA light guide plate.

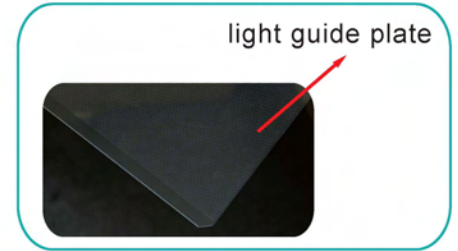

Patented power supply box of UL standard for purpose of fireproofing protection.

back cover of aluminum alloy

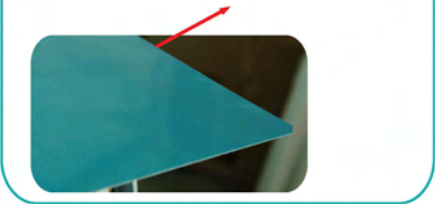


Stylish anodized aluminum frame; flush mounted installation.

PF>0.9, AC100-277V





Ultra Slim, 10.75mm thickness only, more light-weighted.

power supply box

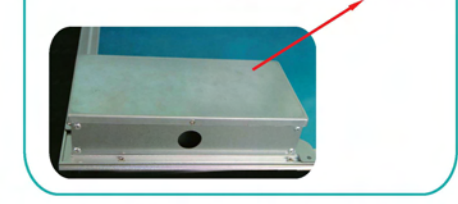

Super light quality & soft, uniform and no-glare.

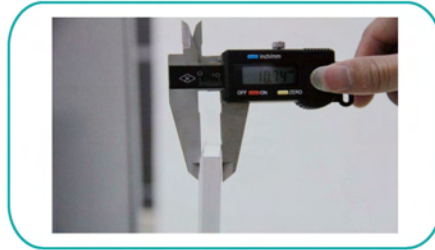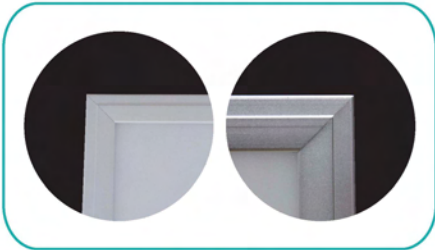

## Parameters

Base type	Part No.	Luminous flux(lm)			Size (mm)	Wattage	CRI	Beam angle	Voltage
		3000k	4000k	5700k					
1x1	TPL300*300-10W	680lm±5%	720lm±5%	750lm±5%	301x301x10.75	10W	>80	120°	AC100-277V
1x1	TPL300*300-20W	1350lm±5%	1450lm±5%	1560lm±5%	301x301x10.75	20W			
1x2	TPL300*600-20W	1350lm±5%	1450lm±5%	1560lm±5%	301x603x10.75	20W			
1x4	TPL300*1200-36W	2450lm±5%	2550lm±5%	2650lm±5%	301x1212x10.75	36W			
2x2	TPL600*600-36W	2450lm±5%	2550lm±5%	2650lm±5%	603x603x10.75	36W			
2x2	TPL600*600-50W	3450lm±5%	3600lm±5%	3700lm±5%	603x603x10.75	50W			
2x4	TPL600*1200-70W	4700lm±5%	4850lm±5%	5000lm±5%	603x1212x12	70W			

## Package

Base type	Carton(L*W*H)	Pcs/carton	NW(KG)/PCS	GW(KG)/PCS	CBM(m³)/Carton	20GP (5.69x2.13x2.18m)	40GP (11.8x2.13x2.18m)
1x1	381x289x387mm	4pcs	1.5	1.9	0.044	545cartons@2180PCS	1181 cartons@4724PCS
1x2	683x289x387mm	4pcs	2.3	3.0	0.081	296cartons@1184PCS	642 cartons@2568PCS
1x4	1265x192x386mm	2pcs	3.85	5.5	0.099	242cartons@484PCS	525 cartons@1050PCS
2x2	683x289x689mm	4pcs	3.65	4.9	0.138	174cartons@696PCS	376cartons@1504PCS
2x4	1265x192x686mm	2pcs	7.6	9.5	0.175	137cartons@274PCS	297cartons@594PCS

