








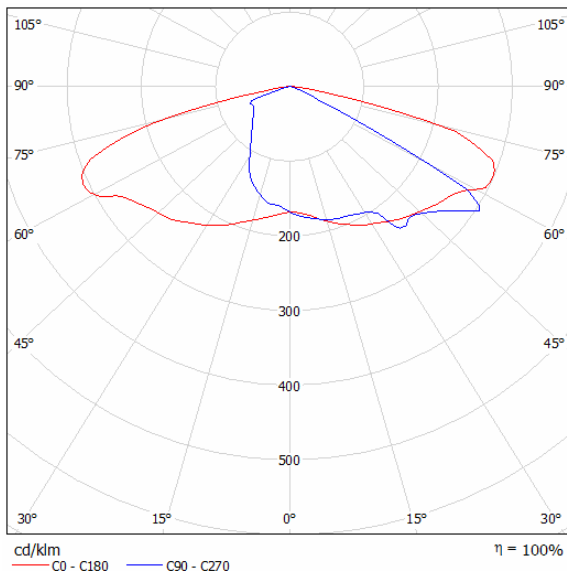


Reliable Supplier, Reliable LED Lamps!


Street Light U-series module-designed

	ST-U40, 40W	ST-U80, 80W	ST-U120, 120W
* CCT 5700K * IP65 * Warranty 2 years			
LED			
Input voltage	AC 90 ~ 305V	AC 90 ~ 305V	AC 90 ~ 305V
Luminous Flux (lm)	3500 lm	7000 lm	10000 lm
Dimension	135 x 190 x 148 mm	304 x 190 x 148 mm	488 x 190 x 148 mm
Weight	3.5 kg	7 kg	10 kg
Power supply	 Mean Well HLG-40H-24 Power factor > 0.9	 Mean Well HLG-80H-42A Power factor > 0.9 Effi. 91%	 Mean Well HLG-120H-24 Power factor > 0.9 Effi. 93%


Photometric diagram



Reliable Supplier, Reliable LED Lamps!

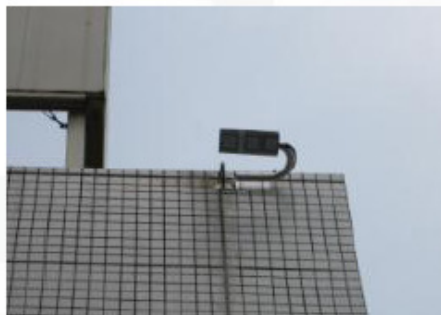


Power cable through the pole and the pole fix in luminaire's holder.
Screw tightly to the luminaire by M10 screw.

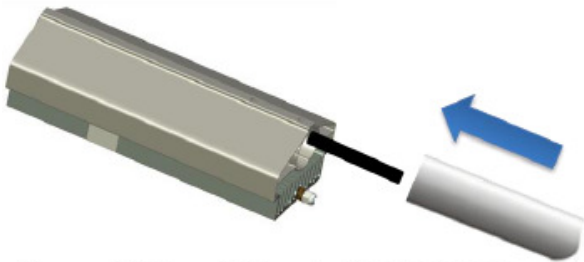

Power cable through the pole and the pole fix
in luminaire's holder.



Screw tightly to the luminaire by M10 screw.

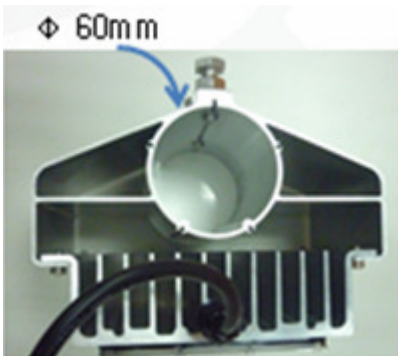

Reliable Supplier, Reliable LED Lamps!

